
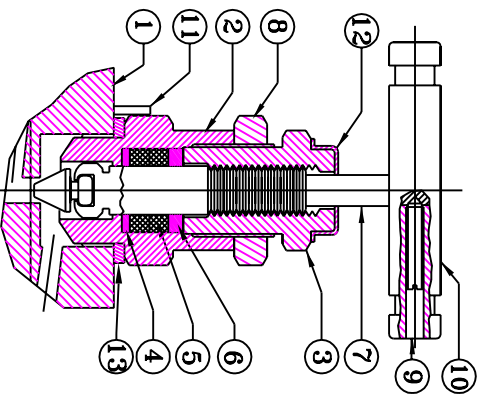


PRESSURE RATING :

TEMP.	C.S.	S.S
ROOM T	6000 PSI	6000 PSI
500°F	4000 PSI	4000 PSI
1000°F	1500 PSI	1500 PSI

ELEVATION

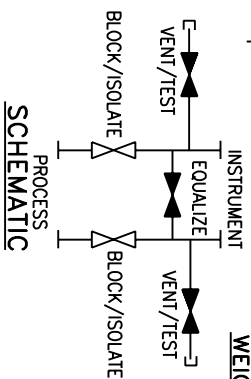

S.NO.	DESCRIPTION	QTY.	MATERIAL
13	WASHER	3	A276-316
12	DUST CAP	3	PLASTIC LD.
11	LOCK PIN	3	A276-316
10	HANDLE	3	A276-304
9	GRUB SCREW	3	STEEL
8	LOCK NUT	3	A479-316
7	SPINDLE	3	A276-316 STELLITED
6	PACKING WASHER	3	A276-316
5	PACKING	6	PTFE/GRAFOIL
4	WASHER	3	A276-316
3	GLAND RETAINER	3	A479-316
2	BONNET	3	A479-316
1	BODY	1	A479-316

NON ROTATING BALL TIP:

NON ROTATING BALL TIP PREVENTS GALLING & PROMOTES REPETITIVE SHUT-OFF. OPTIONAL BALL & PACKING MATERIAL IS AVAILABLE FOR HIGH TEMP. RATING 1000°F @6000 PSI (440°C BALL & GRAPHOL PACKING). HARD STELLITE VEE STEM & PTFE PACKING. (STANDARD).

FEATURES :

ONE PIECE BODY CONSTRUCTION FOR HIGH STRENGTH & FULL SAFETY. NO WELDING. 316 STAINLESS STEEL BODY CONSTRUCTION FOR SUPERIOR CORROSION RESISTANCE. 100% TESTED AT ALL SEATS. CENTER LINE DIMENSION 54mm (2-1/8") FOR ROPEL PORT ALIGNMENT.

MANIFOLD SELECTION INFORMATION DATA :

PRESSURE & TEMPERATURE RATING ARE SELECTED FROM ANSI B16.34 FOR STANDARD CLASS VALVES BASED ON ANSI B16-CLASS 2500 OPTIONAL SOUR GAS SERVICE CONFIRMS TO NACE STD. MR-01-75
WEIGHT-2.3KG.

**TITLE:- 3 VALVE MANIFOLD (PIPE TO FLANGE)
 6000 PSI RANGE BASE VENTED**

DRN.	CDC	SCALE	N.T.S.
CHD.	ET	DATE	19.07.2001
APPD.	JP	DRG.NO.:	3VM-8-SS-DM

PANAM ENGINEERS
 AN ISO 9001 : 2000 COMPANY
 MUMBAI - INDIA

PANAM 3-VALVE MANIFOLD R-TYPE PIPE TO FLANGE BASE MOUNT CONNECTION DESIGNED FOR CONNECTING SYSTEM IMPULSE LINES & TRANSMITTERS. THIS MANIFOLD CONSISTS TO 1/2" NPT FEMALE CONNECTIONS ON 54mm (2-1/8") CENTERS AND OF ONE EQUALIZER VALVE AND TWO BLOCK VALVES.