


# Female Run Tee

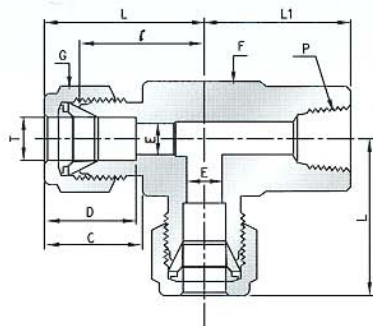

## Imperial Range:

Part No.	Tube O. D. T in	P * (NPT)	E Min	Width across flat		D	C	ℓ	L	L <sub>1</sub>
				F	G					
				in	in					
PFRT-02-02	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.03	24.63	19.05
PFRT-04-02	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.56	26.92	19.05
PFRT-04-04	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
PFRT-06-04	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.88	31.24	22.35
PFRT-08-06	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
PFRT-08-08	1/2	1/2	10.41	1	7/8	22.86	21.84	29.71	39.87	28.44
PFRT-12-12	3/4	3/4	15.74	1-1/4	1-1/8	24.38	21.84	34.54	44.70	31.75

## Metric Range: ISO Tapered Thread

Part No.	Tube O. D. T mm	P * R(PT)	E Min	Width across flat		D	C	ℓ	L	L <sub>1</sub>
				F	G					
				mm	mm					
PFRT-M06-02	6	1/8	4.8	12.70	14	15.3	17.7	19.6	27.0	19.0
PFRT-M06-04	6	1/4	4.8	17.46	14	15.3	17.7	22.4	29.8	22.4
PFRT-M06-08	6	1/2	4.8	25.40	14	15.3	17.7	27.2	34.6	28.4
PFRT-M08-02	8	1/8	6.4	15.87	16	16.2	18.6	22.4	29.9	19.0
PFRT-M08-04	8	1/4	6.4	17.46	16	16.2	18.6	23.1	30.6	22.4
PFRT-M08-06	8	3/8	6.4	20.63	16	16.2	18.6	25.2	32.7	22.4
PFRT-M08-08	8	1/2	6.4	25.40	16	16.2	28.6	28.0	35.5	28.4
PFRT-M12-04	12	1/4	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
PFRT-M12-06	12	3/8	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
PFRT-M12-08	12	1/2	9.5	26.98	22	22.8	22.0	29.7	39.8	28.4
PFRT-M16-08	16	1/2	12.7	25.40	25	24.4	22.0	29.7	39.8	28.4

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.